



Palets
Pla d'Urgell s.l.
donem més vida a la fusta



www.paletspladurgell.cat




973 580 475



info@paletspladurgell.cat



EKO-KWP MULTI DUAL

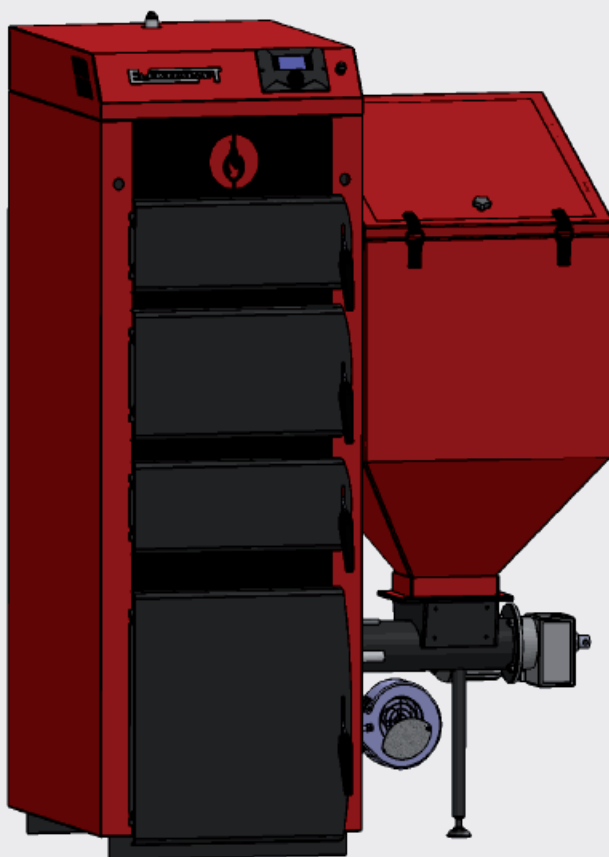

Palets Pla d'Urgell. Crta. de Bellpuig s/n,
25260 Ivars d'Urgell - Lleida

Manufactured
by:

ELEKTROMET®

ELEKTROMET reserves the
right to make technical
changes



EKO-KWP MULTI DUAL

Parameters	Units	EKO KWP 15 Multi dual		EKO KWP 25 Multi dual	
		Solid fuel	Automatic feeding fuel	Solid fuel	Automatic feeding fuel
Nominal power	kW	15	15	24	24
Controlled power range	kW	5-15	5-15	7,5-24	7,5-24
Efficiency	%	aprox. 90		aprox. 90	
Surface of the heat exchanger	m ²	2,5		1,6	
Boiler's class		3		3	
Exhaust gas temperature	°C	160 ~ 250		160 ~ 250	
Boiler's weight without water	kg	420		515	
Water capacity	dm ³	95		135	
Exhaust gas pipe	mm	160		160	
Recommended diameter of the chimney	cm	20 x 20		20 x 20	
Dimension of the fuel tank	mm	470 x 380		470 x 550	
Capacity of the fuel tank	dm ³	225		275	
Maximum working pressure	bar	2,5		2,5	
Recommended heating water temperature	°C	65		65	
Max/min water temperature	°C	85 / 35		85 / 35	
Chimney draught	mbar	0,1 ~ 0,25		0,1 ~ 0,25	
Drain		½"		½"	
Voltage		1~230 V / 50Hz TN-S		1~230 V / 50Hz TN-S	
Power (gear motor + fan)	W	170		170	
Boiler's connections	Heating water (outlet)	1 x 1 ½" , 2 x 1"			
	Heating water (return)	1 x 1 ½"			

* Option to place the feeding tank on the right and left of the boiler. It is required to determine before ordering.





EKO-KWP MULTI DUAL

Parameters	EKO KWP 15 Multi dual	EKO KWP 25 Multi dual
A	560	590
B	1180	1210
C	830	980
D	1220	1310
E	82	82
F	450	500
G	1370	1460
H	1550	1640
I	650	650
J	855	890

