



Palets
Pla d'Urgell s.l.
donem més vida a la fusta



www.paletspladurgell.cat




973 580 475



info@paletspladurgell.cat



EKO-PE

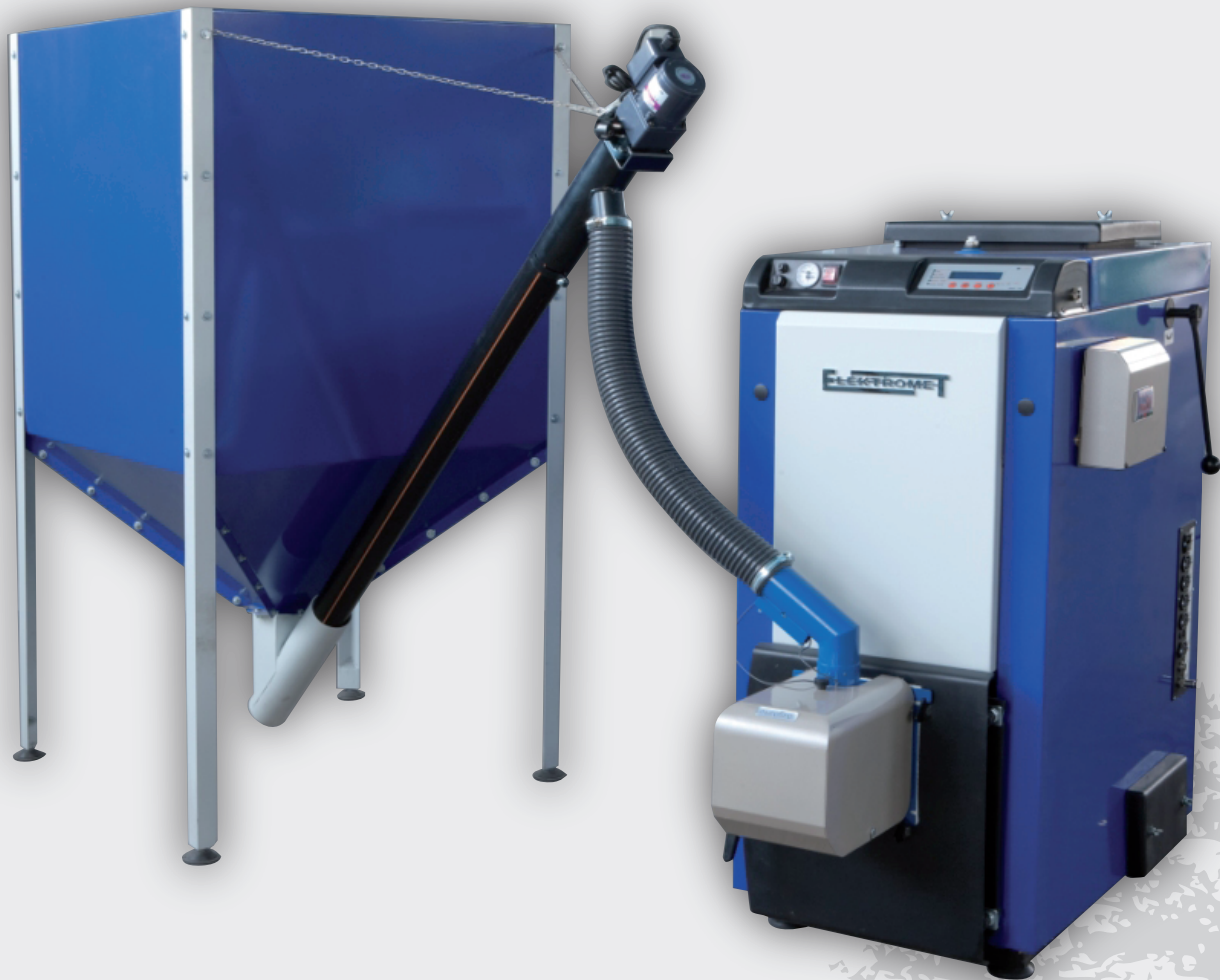

Palets Pla d'Urgell. Crta. de Bellpuig s/n,
25260 Ivars d'Urgell - Lleida

Manufactured
by:

ELEKTROMET®

ELEKTROMET reserves the
right to make technical
changes



EKO-PE

Parameters	Units	EKO PE 20	EKO PE 35	Boiler's connections	EKO PE 20	EKO PE 35
Catalogue number		430-20-103 430-20-106	430-35-103 430-35-106	Heating water (outlet)	2 x 1 1/2"	
Nominal power	kW	20	35	Heating water (return)	2 x 1 1/2"	
Efficiency	%	92,4	90,2			
Water capacity	dm ³	about 110	about 130			
Operating pressure	bar	2,5				
Temperature control range	°C	40 - 85				
Recommended temperature of heating water	°C	55				
Diameter of chimney connector	mm	160				
Required chimney draught	Pa	10 - 20				
Drain		1/2"				
Boiler's weight without water	kg	about. 300	about. 380			
Electric power supply (burner + fan)	W	about 640				
				Dimensions	EKO PE 20	EKO PE 35
				A	515	590
				B	1040	1300
				C	860	935
				D	625	700
				E	80	80
				F	320	350
				G	880	960
				H	1150	1230
				I min.	~1550	~1650
				K	1340	1600

* **Fuel:** Pellets with diameter of 6-8mm on the properties in accordance with EN plus A1.

* **Option to place the feeding tank on the right and left of the boiler. It is required to determine before ordering.**

